

ENGINEERED TO SERVE

FR Pioneer II

Our Pioneer II is the original feature-packed Type II ambulance. Built on a durable ProMaster 2500 159" chassis with 8,900 lbs GVWR, the Pioneer II meets or exceeds KKK-A-1822F and CAAS GVS requirements.



Standard Features

- Ten 15.5"-deep cabinets, all aluminum and LED-lit
- 3,000-watt full sine wave inverter
- Eight 110V dual outlets with 4 USB ports
- Tri-mode LED cabin lighting
- Locking meds safe
- Deep-cycle backup battery
- No-idle HVAC system
- Advanced electrical system
- Digital main O2 system with auto shutoff
- Easy-load main tank
- Rear flip-up step
- Auto-eject shore power
- 35,000-lumen emergency lights
- 6-point restraints


Options

- EKG monitor slide-out drawer
- Command seat upgrades
- UV sanitizer
- Independent rooftop A/C
- Shoreline heating & cooling
- Additional deep-cycle battery
- Additional outlets
- RFID locking med box
- IV solution heating/cooling unit
- Retention systems
- Electrical option pre-wires
- Yellow grab handles

> EXTERIOR



> INTERIOR

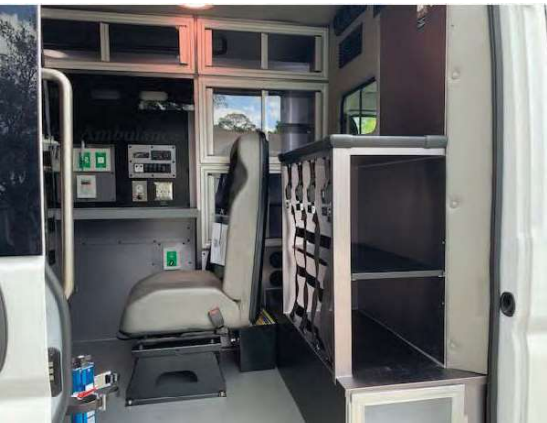

Why Pioneer II?

- ✓ Best-in-class value
- ✓ Safest Type II available
- ✓ Crash tested - Safety tech package included
- ✓ Most efficient ambulance on the market
- ✓ EMT-engineered working environment
- ✓ Most comfortable patient area in a Type II
- ✓ Ambulance system reduces squad workload
- ✓ Industry-leading 6' 4" interior height with low 8' 6" exterior clearance
- ✓ 21" load height and 36' turning radius
- ✓ 5 year / 100,00-mile powertrain warranty



CONVERSIONS

frconversions.com

Innovative, best-in-class ambulances — built by EMS professionals, for EMS professionals.

Engineered to Serve.

CONTACT US

1231 Tech Court Westminster, MD 21157
(844) 372-8267 | sales@frconversions.com